




nandu frameTM

We are proud to introduce the Nandu Frame which can accommodate various seat units, e.g. the Panda Futura size 1-4 and x:panda size 1-3 from R82

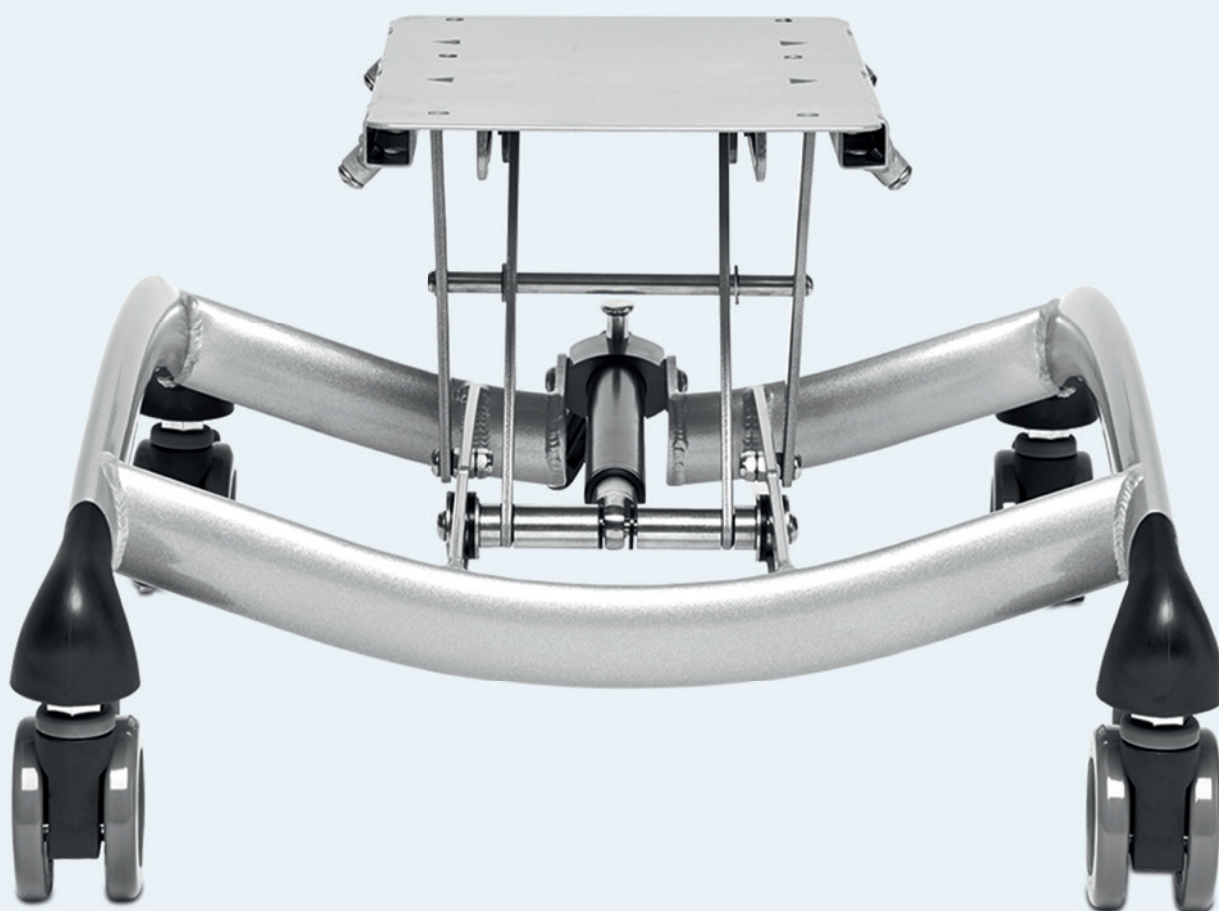

All seats can be mounted directly on the frame or by means of an interface making it easy to switch between frames.

The Nandu Frame is equipped with four smooth running castors which makes it easy to move the frame around, either unaided or with help from an assistant.

The Nandu Frame comes in two sizes, each with up to 15 cm stepless height adjustment and up to 8 degrees forward tilt. Max. load on the frame is 50 kg.



50 cm



56 cm



max.50 kg



Easy to manoeuvre

The smooth running castors make it very easy to move the Nandu Frame around. All four castors are equipped with brakes securing stability



Fixed mounting or interface

Various seats can be mounted directly onto the Nandu Frame. Alternatively the seats can be mounted by means of an interface



Forward tilt

The Nandu Frame has up to 8 degrees forward tilt which helps obtain varied seating positions



Smooth and accurate height adjustment

Turn the spindle to adjust the seat height. The Nandu Frame has up to 15 cm stepless height adjustment



Frame

85101x

Available in two sizes



Adapter

For mounting of Panda Futura and x:panda seats




Smooth and accurate height adjustment



Seats

The Nandu frame is used for more seat units, e.g. the Panda Futura and x:panda. Read about the seats in the Panda Futura and x:panda sections



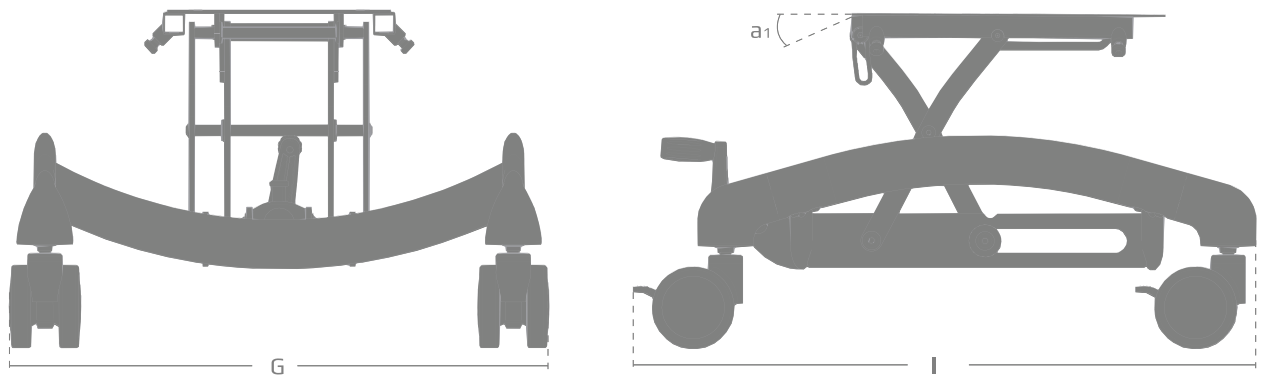

Measurements

	Size 1	Size 2
	cm	cm
Frame width, total (G)	50 cm (19½")	50 cm (19½")
Frame length, total (I)	56 cm (21¾")	56 cm (21¾")
Seat height above floor	16 - 31 cm (6¼ - 12¼")	26 - 41 cm (10¼ - 16¼")
Seat angle (a1)	8°	8°
Weight	7 kg	7 kg
Max. user weight / load	50 kg (110 lb)	50 kg (110 lb)



ACCESSORIES



Foot support

95145-x

A foot plate that can be adjusted in height and angle can be mounted

Size	Measurements
------	--------------

1	B:31 x H:22 cm
2	B:36 x H:25 cm
3	B:42 x H:26 cm



Push brace

89105x5

Push braces for the Nandu are available both with and without angle adjustment

x = 4	wo/ angle adjustment
-------	----------------------

x = 5	w/angle adjustment
-------	--------------------

x = 6	w/angle adjustment
-------	--------------------



Angle adjustable push brace for indoor frame

8910565

