

PAGE 86

# combi frame:x

The Combi Frame:x is a unique wheelchair frame for customized seating systems.





The Combi Frame:x is ideal for both indoor and outdoor use and can be fitted with different seat and back systems.

Both users and caregivers benefit from the many built-in functions and simple adjustment possibilities. The Combi Frame:x is suitable for users needing an individual seating system and base.

The x:panda and Panda Futura seats are easily mounted directly on the Combi Frame:x or by using an adaptor. Other types of seating units are mounted directly onto the base plate.

The frame is available in silver, black or white with  $12\frac{1}{2}$ ", 20", 22" or 24" rear wheels, and 6" or 7" front wheels.







90-114 cm



cm i



max. 100 kg



#### Centre of gravity and tilt in space

The Combi Frame:x centre of gravity is self-centring. The seating unit can be tilted from horizontal to  $40\ \text{degrees}$ 



#### Fixed mounting or interface

Various seats can be mounted directly onto the Combi Frame:x. Alternatively the seats can be mounted into an interface. The frame is used for a variety of seating units like the Panda Futura and x:panda from R82



## Compatible with different seat and back systems

The Combi Frame:x can be equipped with different back systems and cushions



#### Safe transportation in vehicles

The Combi Frame:x complies with the international transit wheelchair standard ISO 7176-19. The Combi Frame:x can be used with seat units that comply with ISO 16840-4






SEATING/COMBI FRAME:X PAGE 88

## Sizes

98xxxxxxxx The Combi Frame:x is available in four sizes

The Combi Frame:x is used for various seat units, e.g. Panda Futura and x:panda. Read about the seats in the Panda Futura and x:panda sections







#### Frame colour

Available in three colours







White

### Rear wheels

Available with different rear wheel sizes



12½" Solid or air



20"/22"/24" Solid or air

## **Brakes**

Choose from the different combinations of brakes



Wheel brake



Drum brake



Wheel brake + Drum brake



## Front wheels

Available with different front wheel sizes





6" solid or air

7" solid or air

## Back recline


Choose from the possibilities of reclining the back






No recline

Recline



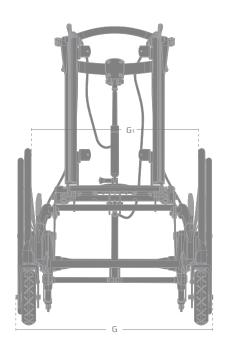

#### Measurements

	Size 1	Size 2	Size 3	Size 4
Width, base plate	22 cm	27 cm	32 cm	37 cm
Depth, base plate	25 cm	30 cm	35 cm	40 cm
Back height (C)	43 cm	47 cm	57 cm	67 cm
Seat height above floor (E)	43-46-49 cm	43-46-49 cm	43-46-49 cm	43-46-49 cm
Width, with 22" wheels (G)	58 cm	63 cm	68 cm	73 cm
Length (H)	83 cm	83 cm	83 cm	83 cm
Height, to the top of push brace fitting (I)	90 cm	94 cm	104 cm	114 cm
Width between wheels (G1)	44 cm	49 cm	56 cm	60 cm
Height, folded, to the top of the back (I)	55 cm	55 cm	55 cm	55 cm
Length, folded, without leg rests	80 cm	80 cm	84 cm	94 cm
Turning radius	600 mm	600 mm	600 mm	600 mm
Weight	22 kg	23 kg	24 kg	27 kg
Weight, without rear wheels	19 kg	20 kg	21 kg	24 kg
Max load (=user+seat+accessories)	100 kg	100 kg	100 kg	100 kg
Max load for transportation (=user+seat+accessories)	100 kg	100 kg	100 kg	100 kg





#### **ACCESSORIES**



Mounting for head support

980200

For mounting directly above the gas spring

See the Accessories section at the back of the catalogue, for further information on options and measurements



Mounting for head support

9802x0

Mounted on separate bar

See the Accessories section at the back of the catalogue, for further information on options and measurements



Mounting brackets, straight

980100

One size



PAGE 90

Mounting brackets, curved

980110

One size



Fix locks

970710

Ease mounting of various vests and belts

One size



Mudguards

98052x

Protect the user and the cushion from debris and dirt from the

One size



Spoke protectors

97102x

Protect the user from getting their fingers caught in the

One size



**Transport fittings** 

980900, 980903

For safe transportation of Combi Frame:x in adapted vehicles

One size



**Adapter** 

8911610-98 + 8911610-99 Prepared for mounting of adaptor for x:panda and Panda Futura seats

One size



Mounting for single foot support

98015x

Two sizes



**Bar for foot support** 897526x

Size Measurements
one L: 19 cm

one L: 24 cm one L: 35 cm



Bar for parted foot supports

897528x

Size	Measurements
one	L: 19 cm
one	L: 25 cm
one	L: 35 cm
one	L: 50 cm



### **ACCESSORIES**



Individual angle adjustable foot supports

89143-x

Size	Measurements
1	W:7½ x D:17 cm
2	W:9½ x D:21 cm
3	W:11 x D:23½ cm



Foot support 89144-x01

Size	Measurements
1	W:9½ x D:16 cm
2	W:12 x D:18½ cm



Parted foot supports 89146-x

Size	Measurements
1	W:10 x D:16 cm
2	W:12½ x D:18½ cm
3	W:13 x D:21 cm



Foot plate model Wombat

95145-2, 95145-3, 95145-4

Size	Measurements
2	W:36 x D:23 cm
3	W:41 x D:24 cm
4	W:48 x D:24 cm



Foot plate model Wombat

95145-1, 85145-2

Size	Measurements
1	W: 31 x D: 19 cm
2	W: 36 x D: 23 cm



Heel stops

One size

970580-1



Leg rest with gas strut 970500-x

Size	Measurements		
	Lower leg length		
1-4	LUB: 28-46 cm		



Fixed angle leg rest 970510-x

Size	Measurements		
	Lower leg length		
1-4	LUB: 24-42 cm		



Calf supports, parted incl. cover

970550-x

Fits on Leg rest with gas strut and Fixed angle leg rest

and rixed drigic leg lest		
Size	Measurements	
Small	H:12½ x W:23 cm	
Large	H:15% x W:23 cm	



Calf support, one piece incl. cover

970555-x

Fits on Leg rest with gas strut and Fixed angle leg rest

a angle leg rese
Measurements
H:17 x W:38 cm
H:23 x W:43 cm
H:23 x W:47½ cm



Extra cover for calf support

Extra cover can be ordered for both parted and one piece calf support

970550-x13	Parted
970550-x13	One Piece



Individual, multiadjustable foot support 981085x-x

Size	Measurements
1	L:18 cm
2	L: 31 cm
3	L: 35 cm



PAGE 92

## **ACCESSORIES**



#### Vent tray

970815 Can be used to carry medical equipment to maximum load of 20 kg

Size Measurements one L:31 x W:30 x H:5 cm



